

Order number: 02 478 06 99

SCHELL exposed urinal flush valve, DN 15 SCHELLOMAT Basic

Benelux model
robust all-metal flush valve with brass push button.

High reliability thanks to plastic cartridge

and integrated jet bore pre-filter.

Flush valve according to EN 12541
With urinal external connector



Scope of delivery:


- exposed urinal flush valve
- flush pipe \varnothing 15 x 314 mm with pipe break
- push rosette

Field of application / Technical data:

- flow volume: 0,3 l/s
- flow pressure: 0,8 - 5,0 bar
- flow volumes adjustable 1 – 6 l

Details:

- Material: all parts in contact with water out of brass conform German drinking water regulation, functioning parts cartridge plastic
- Test Mark: PA-IX 9892/II, DIN-DVGW certified, Belgaqua
- Surface: chrome
- Weight: 0.84 kg/pc.
- Packaging unit: 1
- Dimension: DN 15 G 1/2 ext. thread

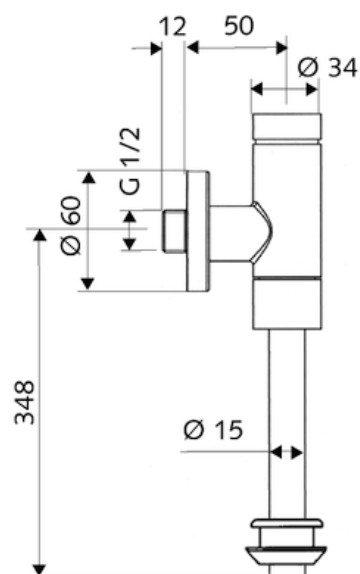

Versions:

Dimension: DN 15 G 1/2 ext. thread Order No.: [02 483 06 99](#)
With urinal inner connector, chrome, PU 1, W: 0.82 kg/pc.

Dimension: DN 15 G 1/2 ext. thread Order No.: [02 484 06 99](#)
With urinal inner connector and integrated isolating valve, chrome, PU 1, W: 0.82 kg/pc.

Dimension: DN 15 G 1/2 ext. thread Order No.: [02 479 06 99](#)
With urinal external connector and integrated isolating valve, chrome, PU 1, W: 0.85 kg/pc.

Recommended associated item:

Flush pipe \varnothing 15 mm Order No.: [50 744 06 99](#)