

ARTIKAL
Item


JT31701

Uzidna baterija sa izlivom, zidnim i ručnim tušem
Concealed mixer with spout, shower and shower set

SLIKA PROIZVODA Product picture



TEHNIČKA SKICA Technical draft

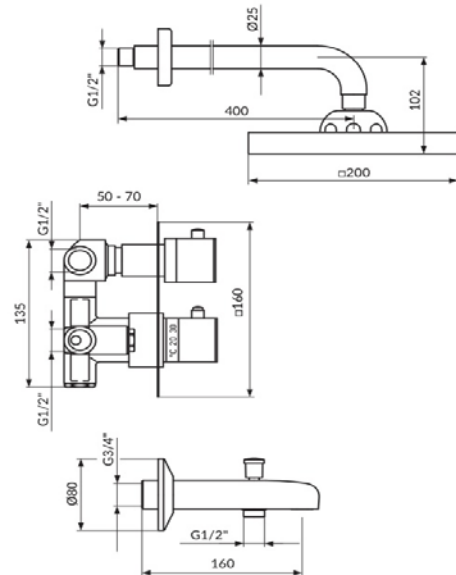

TEHNIČKI PODACI

Termostatska baterija
Montaža u zidu
Klasa protoka C - na izlivu
Regulacija protoka do 5 lit/min na tušu
PKMTH2 mešač
Keramički prebacivač KEROX®
Hromirana rozeta u ravni sa zidom
Polu-automatski prebacivač na izlivu
Konzola tuša L. 400mm
Zglobna tuš ruža D. 200mm
Easy Clean tuš ručica
Duplo pleteno tuš crevo 1.5m

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 80°C
Preporučena temperatura vode: 60°C

TECHNICAL DETAILS

Thermostatic mixer
Built-in wall
Flow class C - on spout
Flow regulation on shower up to 5 lit/min
PKMTH2 thermostatic cartridge
Ceramic diverter cartridge KEROX®
Chromed minimalistic rossete
Semi-automatic diverter on the spout
Shower colum L. 400mm
Shower head D. 200mm
Easy Clean hand shower
Double lock shower hose 1.5m

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 80°C
Suggested max. water temperature : 60°C

www.rosan.rs

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

THERMO2