

ARTIKAL

**133101**

Item


BATERIJA ZA KADU

bath mixer

SLIKA PROIZVODA  
Product picture



TEHNIČKA SKICA  
Technical draft

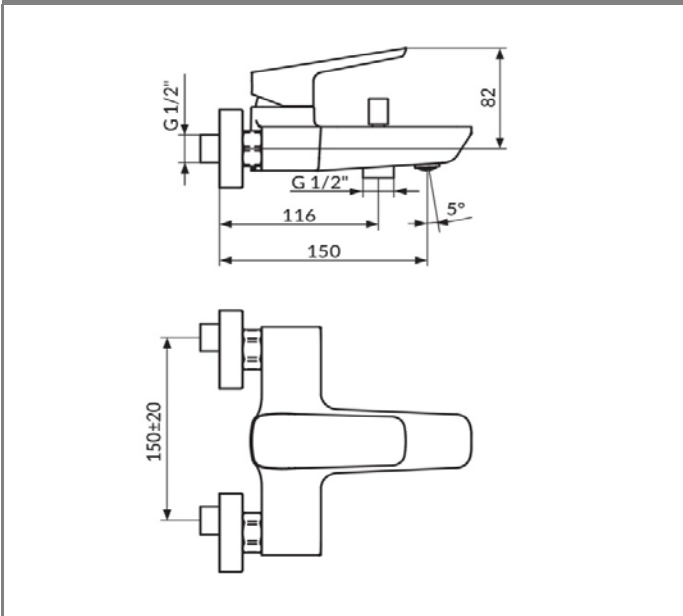

TEHNIČKI PODACI

Jednoručna baterija  
Montaža na zid  
Klasa protoka C  
NEOPERL® PERLATOR® COIN SLOT®  
Keramički mešač KEROX® 35 OP HWS  
Automatski prebacivač NEOPERL® Hybrid  
Easy Clean STOLZ tuš ručica  
STOLZ duplo pleteno tuš crevo 150cm  
HD ekscentar kolena 48mm sa utišivačem  
Klasa bučnosti II

TECHNICAL DETAILS

Single lever mixer  
Wall assembly  
Solid construction  
Aerator NEOPERL® PERLATOR® COIN SLOT®  
Ceramic cartridge KEROX® 35 OP HWS  
Automatic diverter NEOPERL® Hybrid  
Easy Clean STOLZ hand shower  
STOLZ double locked shower hose 150cm  
HD 48mm eccentric connectors with silencer  
Noise Class II

RADNI USLOVI

Maksimalni radni pritisak: 5 bar  
Preporučeni radni pritisak: 3 bar  
Minimalni radni pritisak: 1 bar  
Maksimalna dozvoljena temperatura: 80°C  
Preporučena temperatura vode: 60°C

WORKING CONDITIONS

Max. working pressure : 5 bar  
Suggested working pressure : 3 bar  
Min. working pressure : 1 bar  
Max. working temperature : 80°C  
Suggested max. water temperature : 60°C

[www.rosan.rs](http://www.rosan.rs)

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

**STOLZ**