

ARTIKAL

133102

Item


BATERIJA ZA KADU

bath mixer

SLIKA PROIZVODA
Product picture



TEHNIČKA SKICA
Technical draft

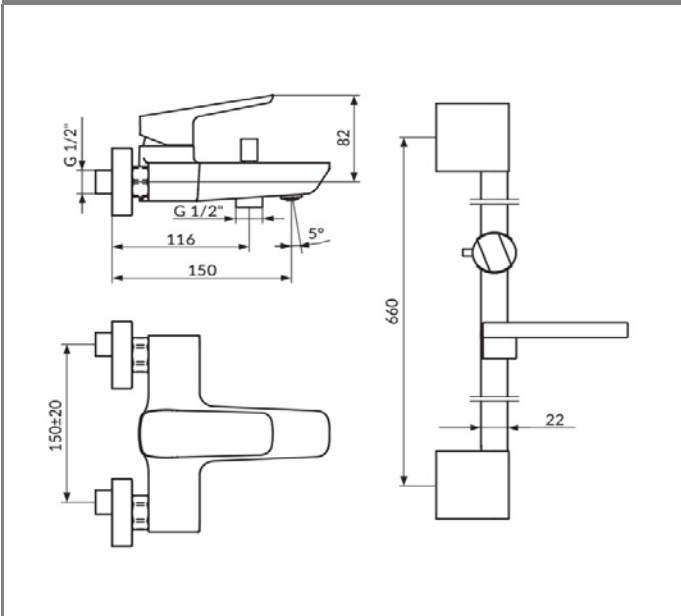

TEHNIČKI PODACI

Jednoručna baterija
Montaža na zid
Klasa protoka C
NEOPERL® PERLATOR® COIN SLOT®
Keramički mešač KEROX® 35 OP HWS
Automatski prebacivač NEOPERL® Hybrid
Easy Clean STOLZ tuš ručica
STOLZ duplo pleteno tuš crevo 150cm
HD ekscentar kolena 48mm sa utišivačem
Klasa bučnosti II

TECHNICAL DETAILS

Single lever mixer
Wall assembly
Solid construction
Aerator NEOPERL® PERLATOR® COIN SLOT®
Ceramic cartridge KEROX® 35 OP HWS
Automatic diverter NEOPERL® Hybrid
Easy Clean STOLZ hand shower
STOLZ double locked shower hose 150cm
HD 48mm eccentric connectors with silencer
Noise Class II

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 80°C
Preporučena temperatura vode: 60°C

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 80°C
Suggested max. water temperature : 60°C

www.rosan.rs

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

STOLZ