

ARTIKAL  
Item


**137251**

BATERIJA ZA TUŠ KADU  
shower mixer

SLIKA PROIZVODA  
Product picture



TEHNIČKA SKICA  
Technical draft

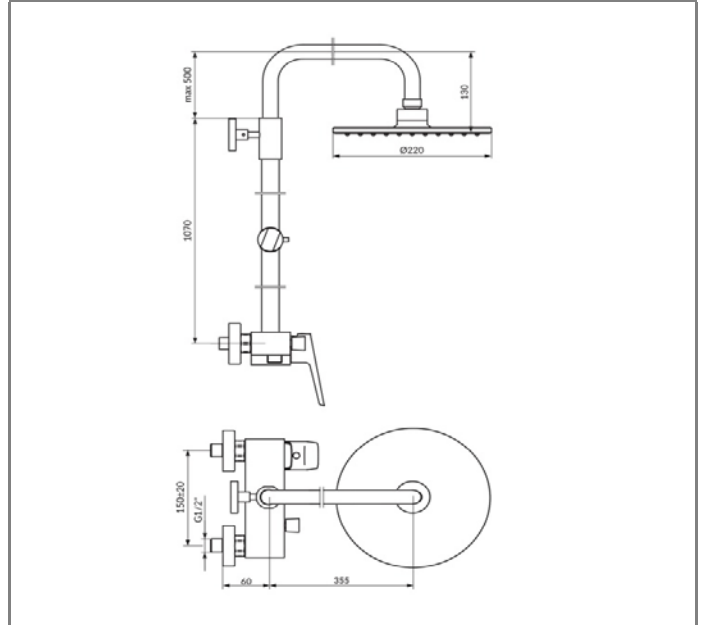

TEHNIČKI PODACI

Jednoručna baterija  
Montaža na zid  
Klasa protoka 9lit/min  
Tuš ruža D.220mm sa zglobom  
Keramički mešač KEROX® 35 OP HWS  
Automatski prebacivač NEOPERL® CDV-18  
Easy Clean STOLZ tuš ručica  
STOLZ duplo pleteno tuš crevo 150cm  
HD ekscentar kolena 48mm sa utišivačem  
Klasa bučnosti II

TECHNICAL DETAILS

Single lever mixer  
Wall assembly  
Flow rate 9 lit/min  
Shower rose D.220mm with knob  
Ceramic cartridge KEROX® 35 OP HWS  
Automatic diverter NEOPERL® CDV-18  
Easy Clean STOLZ hand shower  
STOLZ double locked shower hose 150cm  
HD 48mm eccentric connectors with silencer  
Noise level II

RADNI USLOVI

Maksimalni radni pritisak: 5 bar  
Preporučeni radni pritisak: 3 bar  
Minimalni radni pritisak: 1 bar  
Maksimalna dozvoljena temperatura: 80°C  
Preporučena temperatura vode: 60°C

WORKING CONDITIONS

Max. working pressure : 5 bar  
Suggested working pressure : 3 bar  
Min. working pressure : 1 bar  
Max. working temperature : 80°C  
Suggested max. water temperature : 60°C

[www.rosan.rs](http://www.rosan.rs)

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

**STOLZ**