

ARTIKAL

Item

**137252**


BATERIJA ZA TUŠ KADU

shower mixer

SLIKA PROIZVODA  
Product picture



TEHNIČKA SKICA  
Technical draft

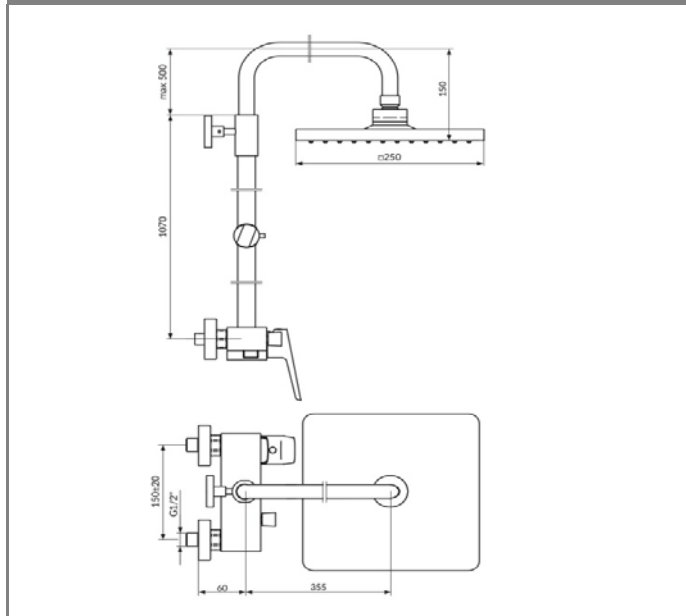

TEHNIČKI PODACI

Jednoručna baterija

Montaža na zid

Klasa protoka 9lit/min

Tuš ruža 250x250mm sa zglobom

Keramički mešač KEROX® 35 OP HWS

Automatski prebacivač NEOPERL® CDV-18

Easy Clean STOLZ tuš ručica

STOLZ duplo pleteno tuš crevo 150cm

HD ekscentar kolena 48mm sa utišivačem

Klasa bučnosti II

TECHNICAL DETAILS

Single lever mixer

Wall assembly

Flow rate 9 lit/min

Shower rose 250x250mm with knob

Ceramic cartridge KEROX® 35 OP HWS

Automatic diverter NEOPERL® CDV-18

Easy Clean STOLZ hand shower

STOLZ double locked shower hose 150cm

HD 48mm eccentric connectors with silencer

Noise level II

RADNI USLOVI

Maksimalni radni pritisak: 5 bar

Preporučeni radni pritisak: 3 bar

Minimalni radni pritisak: 1 bar

Maksimalna dozvoljena temperatura: 80°C

Preporučena temperatura vode: 60°C

WORKING CONDITIONS

Max. working pressure : 5 bar

Suggested working pressure : 3 bar

Min. working pressure : 1 bar

Max. working temperature : 80°C

Suggested max. water temperature : 60°C

[www.rosan.rs](http://www.rosan.rs)

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

**STOLZ**