

ARTIKAL
Item


JA317001

UZIDNA BATERIJA ZA TUŠ
Concealed shower mixer

SLIKA PROIZVODA Product picture



TEHNIČKA SKICA Technical draft

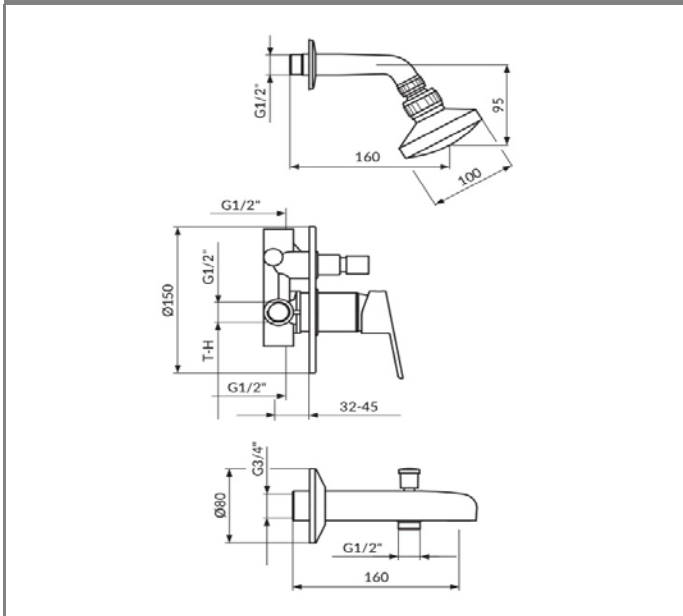

TEHNIČKI PODACI

Jednoručna baterija
Montaža u zidu
Keramički mešač KEROX® 35 HWS
Hromirana rozeta u ravni sa zidom
Automatski prebacivač za tuš
Konzola tuša L. 110mm
Zglobna tuš ruža D.100mm
Duplo pleteno tuš crevo 1.5m
Easy Clean Ručni tuš
Fiksni držač tuša
Izliv za kadu sa poluautomatskim prebacivačem

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 80°C
Preporučena temperatura vode: 60°C

TECHNICAL DETAILS

Single lever mixer
Built-in the wall
Ceramic cartidge KEROX® HWS 35 mm
Chromed rosette
Automatic diverter
Shower console L.110mm
Shower head D.100mm
Double lock shower hose 1.5m
Easy Clean hand shower
Wall shower support
Bath spout with semi-automatic diverter

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 80°C
Suggested max. water temperature : 60°C

www.rosan.rs

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

SMART