


# APZ2012-650 Optimal

Shower drain with an edge for perforated grids or tile embedding, without odour trap

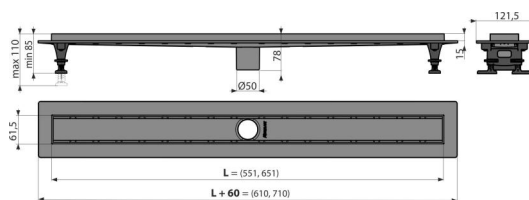

### Application

- For wheelchair access
- For connection to the central trap
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For perforated grids
- For full grid SOLID
- For indoor use
- For grid TILE for embedding tiles

### Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Self-adhesive tape for quality waterproofing
- Installation height from 85 mm
- Adjustable plastic anchor legs 0–27 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

### Scope of supply

- Fixation set for attaching the adjustable legs: screw 4.2×9.5 – 4 pcs
- Fixation set: screw Ø4,2×38 – 4 pcs, dowel Ø8 – 4 pcs
- Self-adhesive waterproofing tape
- Height adjustable feet 2 pcs
- Linear shower drain

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ2012-650	8595580559489	650 mm 1,1604   13,9248   68,7368 kg	720×143×106   730×825×375 mm	14   42 pcs

Warranty	Customs code	Norms
2/6 years *	39229000	EN 1253

### Technical specifications

- Total installation height 85-110 mm
- Minimum thickness of concrete 78 mm
- Waste outlet diameter 50 mm
- Flow of the inlet grid >80 l/min
- Load class K3 300 kg